


PNEUMATICALLY ACTUATED 3-WAY L-PORT BALL VALVE

- Customized Flow Configuration
- 3-way L Port valve with three positions (A to B), (A to C) & (A Blocked) (A Inlet, B & C Outlet)
- PESO Certified IPC Make Flameproof Limit Switch Box with Position Indicator.

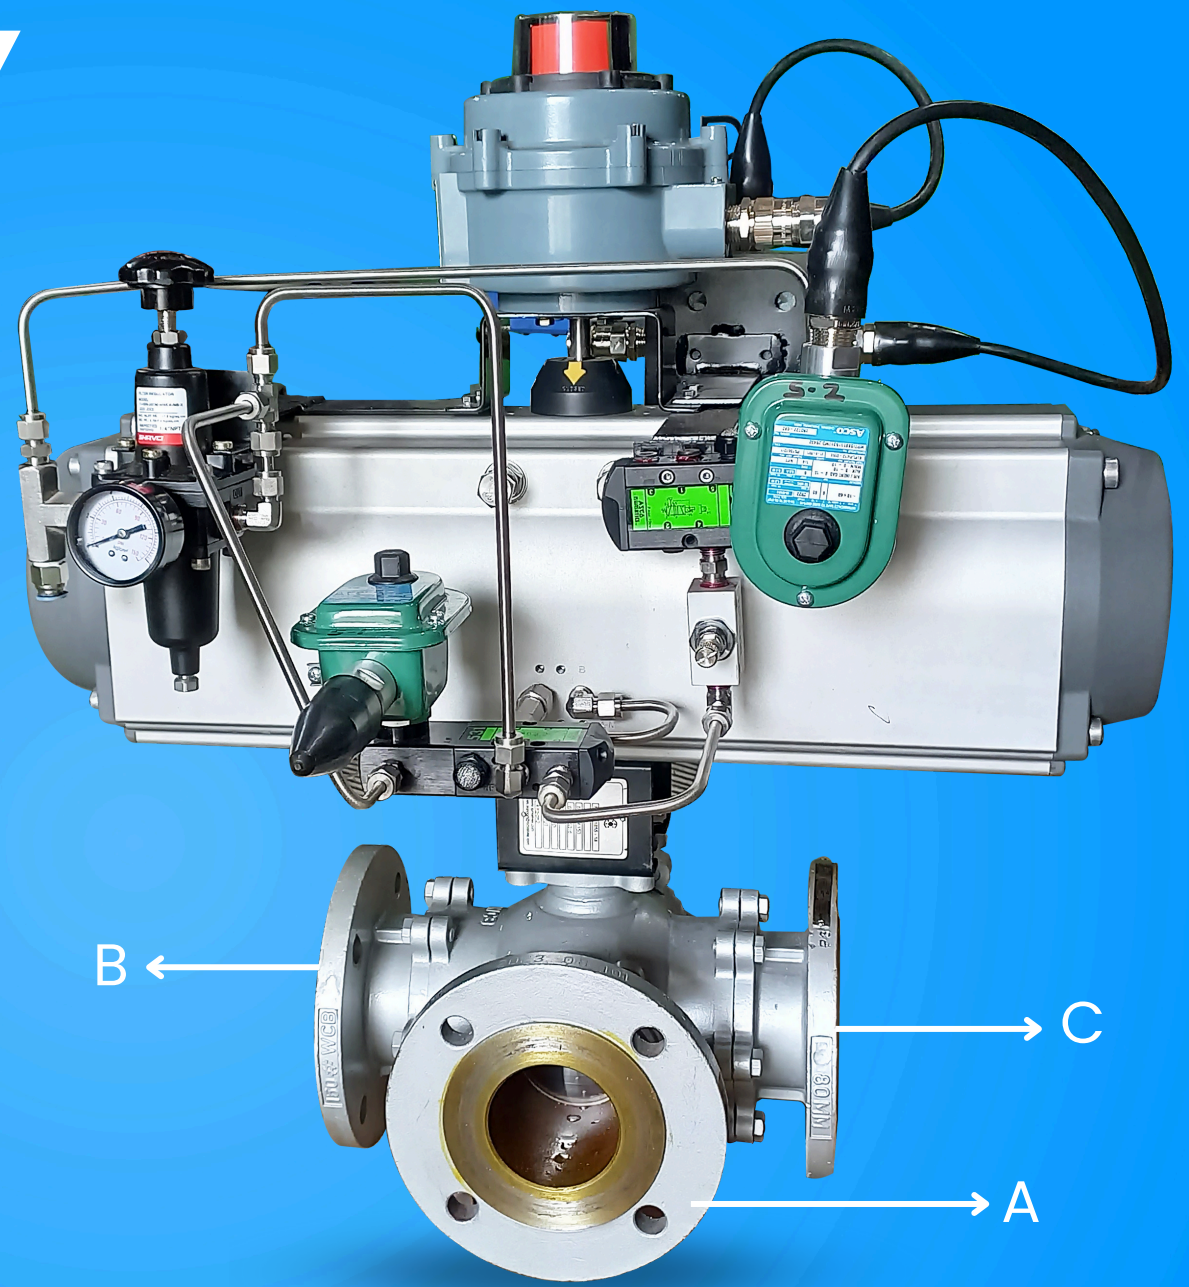

A Inlet, B & C Outlet

SIZE 80 MM	END CONNECTION FLANGED RF	PRESSURE RATING #150	AIR FAIL POSITION STAY-PUT
----------------------	---	--------------------------------	--------------------------------------

VALVE MAKE & TYPE IPC - 3-WAY L-PORT BALL VALVE	PORT FULL BORE	DESIGN STD BSEN 17292	FACE TO FACE ASME B16.10
ACTUATOR DOUBLE ACTING PNEUMATIC ACTUATOR IPCV160D (180 DRGREE TURN)	PAINT HEAT RESISTANT ALUMINUM PAINT	END CONNECTION STD ASME B16.5	OPERATION PNEUMATIC ACTUATOR
FUNCTION (DUTY) ON-OFF	BALL MOC SS 316	SEAT MOC PTFE	BODY MOC ASTM A 216 Gr. WCB
STEM MOC SS 316	TESTING STD BSEN 12266 PART 1	FLOW DIRECTION BI-DIRECTIONAL	SPECIAL VALVE WITH 3 SEATS