


GATE VALVE

SPECIAL TESTING

Radiography On Full Area Body And Bonnet with Flanges As Per ASME B16.34

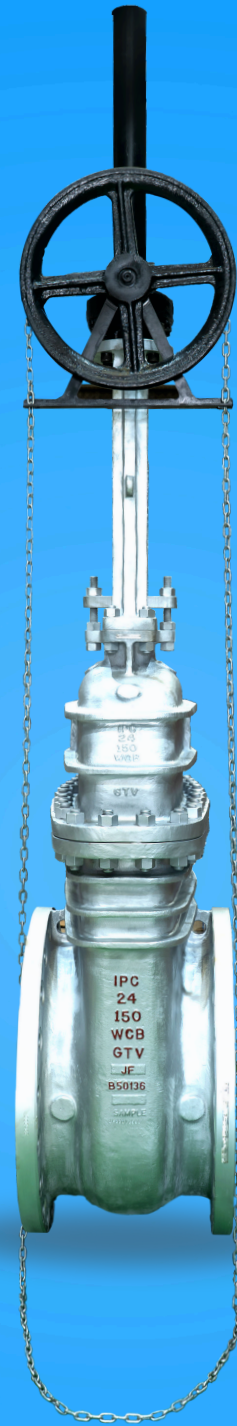

<p>SIZE</p> <p>500 MM</p>	<p>CERTIFICATION</p> <p>IBR</p>	<p>PRESSURE RATING</p> <p>#150 & #300</p>	<p>CLOSING TIME</p>
----------------------------------	--	--	---------------------

<p>VALVE MAKE & SERIES</p> <p>IPC - 701</p>	<p>CONSTRUCTION</p> <p>OS & Y, BOLTED BONNET</p>	<p>TYPE</p> <p>GATE VALVE</p>	<p>DESIGN STD</p> <p>ISO 10434 / API 600</p>
<p>FACE TO FACE</p> <p>AS PER ASME B 16.10</p>	<p>END CONNECTION</p>	<p>TESTING STD.</p> <p>API 598</p>	<p>OPERATING TEMP</p> <p>MAX 425° C & MIN -29° C</p>
<p>OPERATING PRESSURE</p> <p>52 Kg/Cm2 (#150), 20 Kg/Cm2 (#300)</p>	<p>LEAKAGE CLASS</p> <p>API 598</p>	<p>FLOW DIRECTION</p> <p>BI-DIRECTIONAL</p>	<p>TRIM</p> <p>TRIM 5</p>
<p>BODY MOC</p> <p>ASTM A 216 Gr. WCB</p>	<p>WEDGE MOC</p> <p>ASTM A 216 GR. WCB + ST. 6 FACING</p>	<p>BODY SEAT</p> <p>ASTM A 182 GR. F6A + ST. 6 FACING</p>	<p>OPERATOR</p>